

MB1021X1 Gasoline 21h/p
MB1018X1 Gasoline 18h/p



"FUJII BRAND" STANDARD MODELS!!

FREE-LOCK LEVER for stepless selection of mowing height

Cutting height can be set steplessly between 0 - 80mm. Gas spring are used to reduce the force required to operate the lever.

EASY OPERATING SYSTEMS

The operating systems are concentrated in the steering wheel part. The choke knob and throttle lever are located in the steering wheel part near the engine key switch for easy operation.

MINIMUM TURNING RADIUS 1850MM

Minimum turning radius is only 1850mm that provides the machine to make an easy U-turn at the edge of the field and enter the garage.

COMPACT BODY

- 16 liters fuel tank capacity
- Diff Lock System is installed
- Full height of the body is 860mm that makes work under tree is easy
- Able to attach the snow plow in the winter to remove the snow

SPECIFICATION

MODEL	MB1021X1	MB1018X1	MODEL	MB1021X1	MB1018X1
LENGTH	1830mm		TYRE SIZE	FRONT 3.50-7(Φ350) REAR 16×7.00-8(Φ400)	
WIDTH	1010mm		STEERING WHEEL	ROUND STEERING WHEEL	
HEIGHT	860mm		TURNING DIAMETER	1850mm (MINIMUM)	
WEIGHT	295kg	285kg	INCLINATION	1 0degree	
CUTTING WIDTH	950mm		ENGINE MODEL	KAWASAKI FH641V	KAWASAKI FH531V
BLADE TYPE	KNIFE STAY x 1 FREE KNIFE x 2		ENGINE TYPE	4 cycle vertical shaft air cooled engine	
CUTTING HEIGHT	0-80mm (STEPLESS)		MAX OUTPUT	15.7kw (21.0ps)	13.4kw (18.0ps)
MAXIMUM WORK CAPACITY	8 0a/h	7 0a/h	STARTER	Cell starter	
TRAVELLING GEAR	HST		FUEL TANK CAPACITY	1 6 L	
WORK CLUTCH	BELT TENTION SYSTEM		LIGHT	Built In	
SPEED	FORWARD	HIGH 0~10.0km/h LOW 0~ 6.0km/h	OPTION	HOUR METER SNOW PLOW	
	REAR	HIGH 0~ 5.8km/h LOW 0~ 3.5km/h			



SAFE WORK

*THESE SPECIFICATIONS, APPEARANCE OF THE MACHINE IN THIS CATALOGUE MAY CHANGE WITHOUT ANY NOTICE.
 *WORKING CAPACITY DEPENDS ON WORKING CONDITIONS AND OTHER CONDITIONS.

FUJII CORPORATION

285 KOIKE, TSUBAME CITY, NIIGATA, JAPAN

TEL: +81 256 64 5512

FAX: +81 256 64 5763

EMAIL: santa@e-fujii.co.jp

RIDE-ON GRASS MOWER OF ULTIMATE EASE OF USE



CUTTING HEIGHT CAN BE SET BETWEEN 0-80MM

FREE LOCK LEVER ALLOWING STEPLESS SELECTION OF CUTTING HEIGHT

GAS SPRINGS ARE USED TO REDUCE THE FORCE REQUIRED TO OPERATE THE LEVER.



LARGE TURNING ANGLE

EASY TO TURN, EASY TO OPERATE

LARGE TURNING ANGLE MAKE IT EASY TO OPERATE AT ANY WORKING SITUATIONS AND CONDITIONS.




EASY TO REFILL

16 LITER CAPACITY

LARGE FUEL TANK CAPACITY

THE REAR COVER HAS A VERY SIMPLE DESIGN. THE FUEL TANK HAS A LARGE CAPACITY OF 16 LITERS.

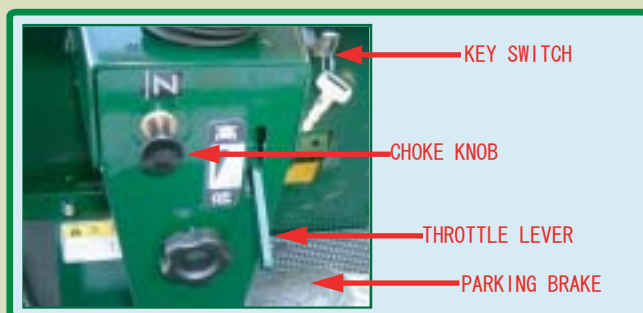

KEY SWITCH

CHOKE KNOB

THROTTLE LEVER

PARKING BRAKE

OPERATING SYSTEMS IN STEERING WHEEL PART

STARTER KEY, CHOKE KNOB, THROTTLE LEVER AND PARKING BRAKE ARE LOCATED IN THE STEERING WHEEL PART NEAR THE ENGINE FOR EASY OPERATION.



SNOW PLOW IN THE WINTER

BY INSTALLING THE OPTIONAL SNOW PLOW, THE MACHINE CAN BE USED TO REMOVE THE SNOW IN INTER.

SUITABLE FOR MOWING GRASS IN EMBANKMENTS AND ORCHARDS

